

PROFICUT



FM 37982

■ DRAGON | TRAKTOR ZA REZANJE

DRAGON je namenjen za transport različnih vrsta gorionika za autogeno rezanje sa držačem prečnika 28-35 mm (1-1 / 8" do 1-3 / 8") za obavljanje procesa rezanja i obaranja ivica uz pomoć mašine u različitim primenama.




DRAGON za autogeno rezanje

Velika brzina rezanja plazmom i rezanje kosina dostupno je pomoću modela Draganon HS.



DRAGON HS za rezanje plazmom

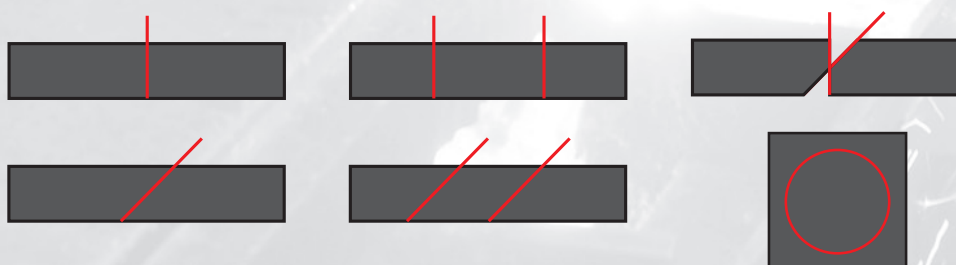







■ Osnovne karakteristike i prednosti:

- Najsavremenija digitalno kontrolisana šina/vuča za gorionik
- Rezanje i rezanje pod nagibom do 45°
(paralelno pomoću 2 gorionika)
- Brzi držač gorionika za gorionike prečnika od 28 mm do 35 mm
- Napredni sistem kontrole brzine sa implementiranim digitalnim PID regulatorom
- LED displej sa očitavanjem aktuelne i podešene brzine, i izveštaj poruka
- Konstrukcija otporna na toplotu
- Pogon na dva točka sa jedinicom za automatsko kočenje
- Prekidač za brzo otpuštanje pogona za jednostavno ponovno pozicioniranje
- Pokreće se na šini ili direktno na radnom predmetu
- Priklučne šine za različite dužine
- Širok asortiman dodatne opreme za različite primene kao što su držači gorionika za mašine, razdelnici, dodaci za rezanje kruga itd.

TECHNICAL SPECIFICATIONS

	Dragon	Dragon HS
Napon	~ 115-230 V, 50-60 Hz	~ 115-230 V, 50-60 Hz
Snaga	20 W	20 W
Položaj rezanja	horizontalno	horizontalno
Prečnik gorionika	28-35 mm (1.10-1.38")	28-35 mm (1.10-1.38")
Najmanja visina iznad stajne površine	8 mm (0.31")	8 mm (0.31")
Brzina	0-150 cm/min (0-59 in/min)	10-300 cm/min (4-118 in/min)
Težina	16.8 kg (37.0 lbs)	16.8 kg (37.0 lbs)

Dimenzije:

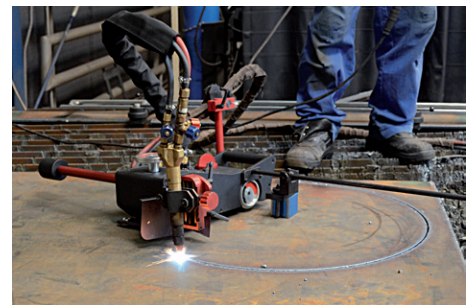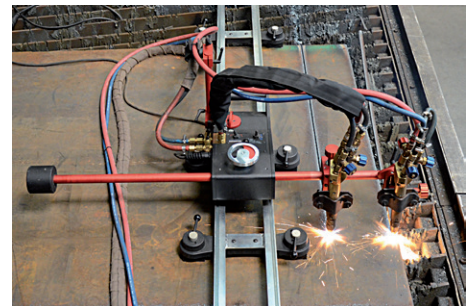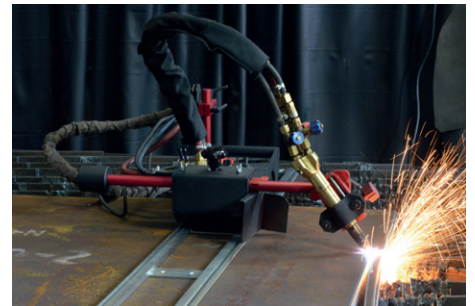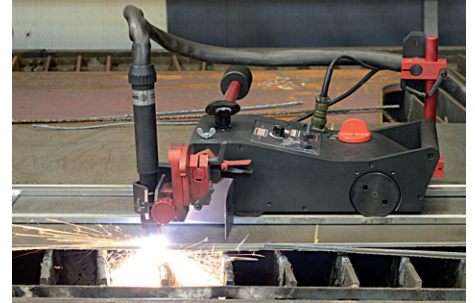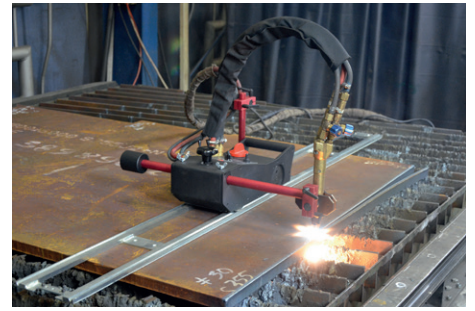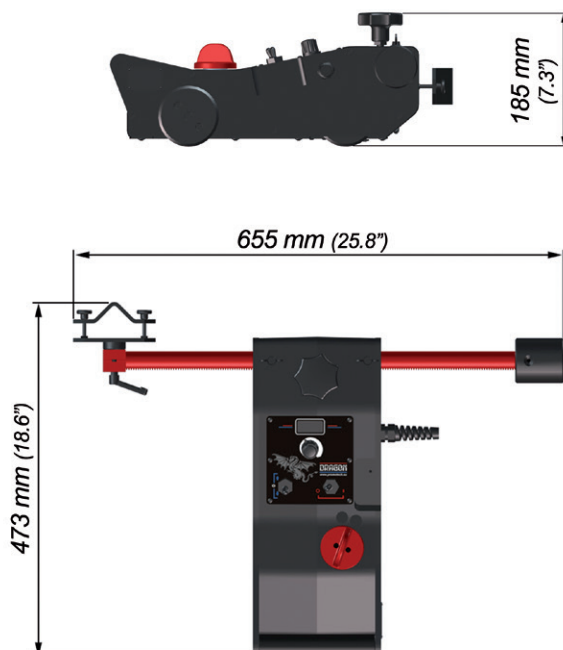

Standardna oprema za Dragon i Dragon HS



RAM-0525-07-00-00-0
540 mm (21") Klizni nosač



PWG-0475-09-00-00-0
Protivteg 1.3 kg (2.9 lbs)




UCW-0475-28-00-00-0
Standardni držač gorionika
sa podešavanjem ugla




Kabl za napajanje 3 m
(9,7 ft)

Opciona oprema za Dragon i Dragon HS

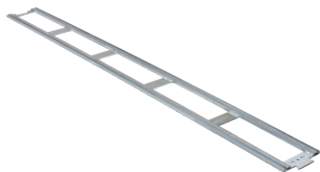


TRO-0475-13-00-00-0
Montažna šina 1800 mm (70,9")
V" Žleb centralne linije 152 mm (6")



ZSP-0475-44-00-00-0
Magnetska jedinica



PDS-0582-10-00-02-0
Magnetska uska jedinica sa
šestouglom



MST-0541-10-02-00-0
Vakuumska modularna
jedinica



ZCS-0475-28-10-00-0
Standardni držač gorionika
28-35 mm (1.10-1.38")



UCW-0475-08-00-00-0
Precizan držač gorionika sa uglom
i podešavanjem visine




RAM-0475-23-00-00-0
Klizni nosač




PWG-0475-10-00-00-0
Veliki protivteg
2,6 kg (5,7lbs)




UCW-0475-15-00-00-1
Držač kliznog nosača

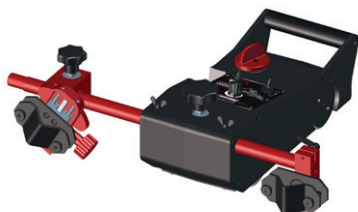

PDT-0475-34-00-00-0
Držač kabla

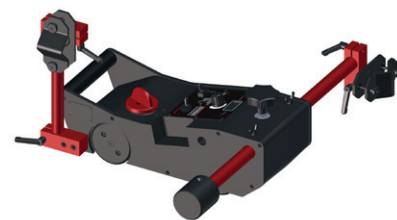

PDT-0475-26-00-00-0
Držač valjka



Cyr-0475-22-00-00-0
Dodatak za kružno sečenje



OSL-0475-54-00-00-0
Štitnik za zaštitu od toplote
(levi)





OSL-0475-55-00-00-0
Štitnik za zaštitu od toplote
(desni)



OSL-0475-53-00-00-0
Štitnik za zaštitu od toplote
(osnova)

■ Opcioni dodaci za Oxy-fuel

Vrsta priključka za gas	Metric
Priključak 2x2	RZD-0475-64-00-00-0
Priključak 2x3	RZD-0475-63-00-00-0
Priključak 3/3	RZD-0475-74-00-00-0
Priključak 2x2 sa zapornim ventilom	RZD-0475-65-00-00-0
Priključak 2/3 sa zapornim ventilom	RZD-0475-66-00-00-0
Priključak 3/3 sa zapornim ventilom	RZD-0475-72-00-00-0

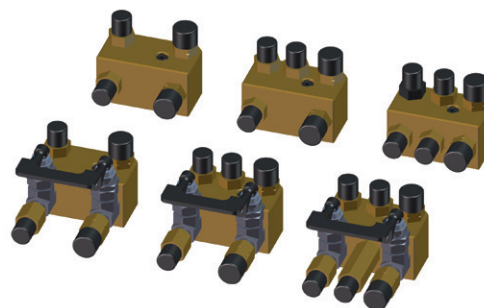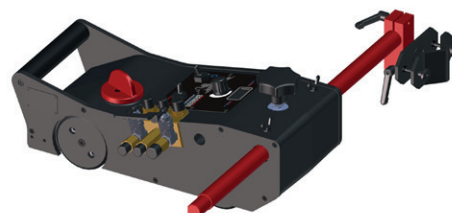

UCW-0475-61-00-00-0
Držač cevi i kablova gorionika
Ø 30 mm (1.18")



UCW-0475-29-00-00-1
Držač cevi i kablova gorionika
Ø 35 mm (1.38")

UCW-0475-59-00-00-0 Precise
Držač gorionika
Ø 30 mm (1.18")

UCW-0475-42-00-00-1
Držač gorionika za precizno
podešavanje
Ø 35 mm (1.38")

■ Opcioni dodaci za Plazmu (Dragon HS)



ZSP-0475-58-00-00-0
Paljenje plazma luka



KBL-0475-58-05-00-0
Kabel za paljenje plazma
lukom

